




24E RoHS Compliant

贴片保险丝

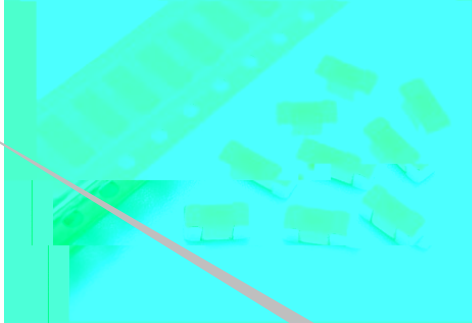


50 Amperes at 125V AC/DC(100mA~20A)

工作温度:
Operating Temperature: -55°C ~ +125°C

材料:
Materials:
End cap: Ag plated brass
Ceramic tube: ceramic

焊接方法:
Soldering Method:
Reflow soldering: 260°C, 10s max

包装:
Packaging:
Automaton taped 100PCS per reel,
2000PCS per carton

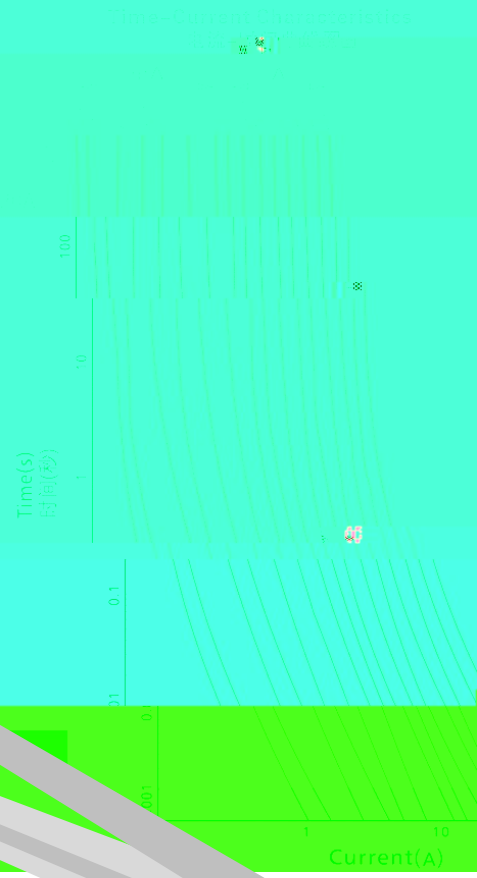

电气特性: Electrical Characteristics

熔断率 % of Amperes Rating

100%
200%

熔断时间 (秒) Melting Time (s)

4 hours (4小时)
60s (60s)

Catalog No. H30V G30V A20V B12V

Part Number	Current Rating	Voltage Rating	Package Code
24E01HGAB	10A	30V/30V/25V/125V	006
24E02HGAB	20A	30V/30V/25V/125V	006
24E03HGAB	25A	30V/30V/25V/125V	006
24E05HGAB	31.5A	30V/30V/25V/125V	014